



Chemical Pump - C8050

C8050 1/2 HP 3840 GPH @ 10'



Model shown:
C8050-DFC2

- 304 Stainless Steel Construction
- Energy efficient PSC motors
- 304 Stainless steel impeller

Switch Options Available:



DFC1



DFC1.5



DFC2



VS



VSC1.5



VSC2



TS



TSC1.5



TSC2

Models available:

- C8050-NS (No Switch - pump only)
- C8050-DFC1 (Includes Standard Controller with Dual Float Switch)
- C8050-DFC1.5 (Includes Enhanced Controller with Dual Float Switch)
- C8050-DFC2 (Includes Deluxe Controller with Dual Float Switch)
- C8050-VS (No Controller - pump and Vertical Switch only)
- C8050-VSC1.5 (Includes Enhanced Controller with Vertical Float Switch)
- C8050-VSC2 (Includes Deluxe Controller with Vertical Float Switch)
- C8050-TS (No Controller - pump and Tether Switch only)
- C8050-TSC1.5 (Includes Enhanced Controller with Tether Switch)
- C8050-TSC2 (Includes Deluxe Controller with Tether Switch)

Industrial Grade for the Residential Market



www.StopFlooding.com

800-991-0466

Chemical Pump - C8050

Pump Features and Construction

- All 304 Stainless steel construction
- Energy efficient permanent split capacitor (PSC) motor
- Intended for pumping non-flammable fluids compatible with pump component materials
- Thermally protected
- Stainless steel shaft
- Pump solids up to 1/4"
- Removable strainer
- Upper and lower sealed ball bearings
- Dual carbon / Ceramic / Viton seals
- 304 Stainless steel impeller
- Food grade pump
- 20' Pump cord



Specifications and Dimensions

Flow @ 5 ft. Head	4440 GPH/ 74 GPM
Flow @ 10 ft. Head	3840 GPH/ 64 GPM
Max Head	36 ft. (11.0 m)
Strainer	304 Stainless Steel
Discharge	2" (5.1 cm.)
Motor HP/Type	1/2 HP - PSC Motor
Voltage	115 VAC, 60 Hz
Amp. Draw @ 10 ft. Head	4.7 Amps
Width	6.3" (16.0 cm)
Depth	9.1" (23.1 cm)
Height	16.3" (41.4 cm)
Weight	23.0 lbs. (10.4 kg)

Mix and Match Ordering

You have flexibility to order any pump with any switch


- **Option 1** - Order a pump and a switch as separate items
- **Option 2** - Order as a pre-packaged system with any switch in a single carton, ready for delivery

Switches and Controllers Comparison

	Standard	Enhanced	Deluxe
	DFC1	DFC1.5 VSC1.5 TSC1.5	DFC2 VSC2 TSC2
Available with Dual Float Switch	•	•	•
Available with low voltage Vertical Switch		•	•
Available with Tether Switch		•	•
Sounds an alarm and alerts when:			
AC power has failed			•
Pump or float problem is detected			•
9V battery is low or slide switch is off			•
Remote Notification Connections: (Allows for connection to external devices)			
USB Data Port (Can send specific email, text, or In-App notifications to your phone, tablet or computer)			•
Remote Terminal (Allows for basic alerts via text, email, In-App, home security, or other dry-contact based device)			•
Float switch can be unplugged from controller for easy installation		•	•
System operating light (flashes)		•	•
Adjustable run time from 5-45 seconds after the float drops		•	•
Activates pump weekly to exercise and extend pump life		•	•
Universal controller mounting tabs		•	•
2' power cord		•	
4' power cord			•
10' float switch cord	•	•	•
Piggy-back plug	•	•	•
High Water Accessory Available			•

Includes: Switch, manual and stainless steel hose clamp

Flow Chart

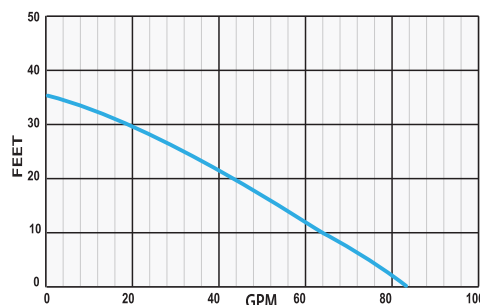

Why Pro Series Pumps?

Premium Components

- Designed for higher pumping capacities, increased energy efficiencies, resulting in proven reliability
- Industrial grade, built for the residential market
- PSC motors
- Upper and lower ball bearings

Exceeding Expectations

- Patented switches and controllers with state-of-the-art monitoring systems
- "Good, Better, Best" offering allows for a wide range of products to best fit your needs

On the Forefront of Technology

- Many of the models within the Pro Series line have a USB Data Port and Remote Terminal which allows for connection to an external device that can notify a home owner of a problem or needed maintenance while away from home
- Receive text, email, or in-app notifications while away from home

Available from: