



Sewage Pump Instruction Manual & Safety Warnings

Model EBIS40V



Important Safety Instructions

SAVE THESE INSTRUCTIONS. This manual contains important SAFETY WARNINGS and OPERATING INSTRUCTIONS. You will need to refer to it before attempting any installation or maintenance. **ALWAYS** keep these instructions with the unit so that they will be easily accessible. Failure to read and follow these warnings and instructions could result in property damage, serious injury, or death.

⚠ WARNING

Risk of electric shock. To reduce this risk, observe the following precautions.

- **ALWAYS** disconnect the pump and float switch controller from the power source before servicing or making adjustments.
- **NEVER** handle the pump or motor with wet hands or when standing on a wet or damp surface while the pump is plugged into the power source.
- **MAKE SURE THERE IS A PROPERLY GROUNDED RECEPTACLE AVAILABLE.** This pump is wired with a 3-prong grounded plug. To reduce the risk of electric shock, be certain that it is only connected to a properly grounded, 3-prong receptacle. If you have a 2-prong receptacle, have a licensed electrician replace it with a 3-prong receptacle according to local codes and ordinances.
- **NEVER** bypass grounding wires or remove the ground prong from the plug.
- **DO NOT** use an extension cord. The electrical outlet should be within the length of the pump's power cord, and at least 4 feet above the floor level to minimize potential hazards from flood conditions.
- **DO** protect the electrical cord from sharp objects, hot surfaces, oil, and chemicals. Avoid kinking the cord.
- **MAKE SURE** the supply circuit has a dedicated fuse or circuit breaker rated to handle the power requirements noted on the nameplate of the pump.

⚠ CAUTION

To reduce the risk of hazards that can cause injury or property damage, observe the following precautions.

- **DO NOT** use the power cord or strain relief to carry the pump. Use the pump handle.
- **DO NOT** pull on the float switch cord.
- **DO NOT** use in continuous duty applications such as fountains or ponds. This pump is rated for intermittent use only.
- **DO NOT** operate this product if it has been damaged in any way.
- **DO NOT** use sewage pumps in pits handling salt water or hazardous liquids.
- **DO NOT** flush foreign objects down the toilet including but not limited to paper towels, napkins, wipes, baby wipes, feminine products (sanitary napkins or tampons), prophylactics, contraceptives, or dental floss.
- **DO NOT** disassemble this product. When service is required, contact Glentronics technical support at 800-991-0466. Return the product to the manufacturer for any repairs at the following address:
Glentronics, Inc., 645 Heathrow Drive, Lincolnshire, IL 60069
- When installing or replacing a sewage pump you should also install a high water alarm.

Specifications	4/10 HP Model EBIS40V
GPH @ 5'	5640
GPH @ 10'	4440
Pump diameter	9"
Volts	115V, 60Hz
Amps	6.3

Items Included:

- Pump
- Stainless steel hose clamp

You may also need:

- 2" rigid PVC pipe to connect to the existing plumbing
- A check valve or union
- PVC pipe cleaner and cement

NOTICES

- When a check valve is used, a 3/16" (4.76mm) air bleed hole must be drilled in the PVC pipe above the pump. Drill the hole at a 45° angle toward the bottom of the pit to avoid splashing water outside the pit. Make sure the hole is above the water line, and below the check valve. If a hole is not drilled above the pump, an air lock may prevent the pump from operating.
- The control unit must receive 115V AC +/- 5% and 60 Hz from the AC outlet.
- Sewage pumps will not operate during a power outage. **DO NOT** use plumbing fixtures that are connected to the sewage pit during a power outage. With the risk of property damage, the addition of a high water alarm or sensor is highly recommended.
- After the initial installation, be sure to check the operation by filling the pit with water and observing the pump operation through several full cycles.
- In instances where the discharge line is exposed to freezing temperatures, the pipe must be sloped downward so any remaining water will drain out. Failure to do so will prevent water from exiting the pit and damage the pump if the line freezes.

Installation Instructions

Prior to Installation



1. Visually inspect your pump. Products may be damaged during shipping. If the product has been damaged, contact your place of purchase or Glentronics, Inc. before installation.
2. Thoroughly read the instructions provided to learn specific details regarding installation and use. This manual should be retained for future reference.

! WARNING

This installation must be in accordance with the National Electric Code and all applicable local codes and ordinances.

Installing the Pump

1. Use a pit that conforms to all local codes and is large enough to accommodate the pump and float switch. Larger sewage pits are preferred, since they will extend the discharge cycle and reduce the number of times the pump turns on.
2. Clean the pit of all debris. The pump's inlet must be kept clear.
3. The pump should not be set directly onto a clay, earthen, or sand base. You should install bricks or blocks under the pump to provide a solid base.
4. The pump should be level. To avoid debris from pouring onto the float, it should be positioned on the side of the discharge pipe opposite the drain tile.
5. Install discharge plumbing according to local, regional and state codes. Rigid PVC pipe is recommended.
6. An in-line check valve is recommended to prevent back-flow. Note: When using a check valve, an air bleed hole of 3/16" (4.76mm) for the E7 Series needs to be drilled in the discharge pipe. The hole must be drilled below the check valve. A small stream of water will escape through this air bleed hole when the pump is running, so the hole should be drilled on an angle toward the bottom of the pit. If a hole is not drilled an air lock may prevent the pump from operating.
7. Install a gate valve or ball valve if required by any codes.
8. The horizontal discharge pipe must be positioned in a downward slope so any remaining water will drain away. Failure to do this will prevent water from exiting the pit and damage the pump if the line freezes.
9. If you are replacing an old pump:
 - (a) Unplug the pump from the outlet.
 - (b) Loosen the check valve or rubber union by unscrewing the bottom hose clamp. (If the existing system is installed without a check valve or rubber union, saw the pipe apart above the pit.)
 - (c) Remove the old pump and unscrew the pipe and adapter.
 - (d) If the adapter fits into the new pump, screw the pipe into the pump. If not, cut a piece of rigid PVC pipe and connect it to the

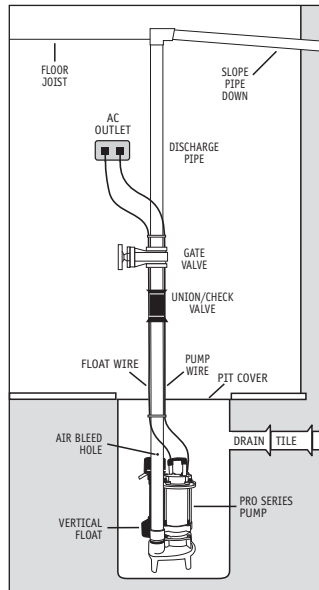


new adapter by cleaning and cementing the two pieces together. (Follow the instructions on the PVC cleaner and cement.)

- (e) Lower the pump into the pit by the handle.
 - (f) Connect the pipe on the pump to the existing discharge pipe with a rubber union or check valve and tighten the hose clamps securely.
10. A cover is required in all sewage pump installations with gas-tight seals to contain gases and odors. A vent pipe should be added in any sewage installation.
 11. Plug the pump's power cord directly into a properly grounded 3 prong AC outlet.

The Vertical Float Switch

The vertical float switch contains a single large float. Water will lift the float to the top of the lift rod which will raise the lift rod and activate the pump. As the pump evacuates the water from the pit the float will drop, lowering the lift rod and turning off the pump. **Note: The vertical float switch must be moving freely at all times. Make sure the float switch does not come into contact with other pumps, wires, pipe or any other object that may be in the pit. The float switch must not come into contact with the pit floor or wall. If the float switch does not move freely the pump will not activate.**



Completing the Installation

1. After the initial installation, be sure to check the pump operation by filling the pit with water and observing the pump through several full cycles. *Note: When the pump activates, it should have a "normal pumping" sound. Any abnormal sound, vibration, or lack of output is the signal of a problem. Stop the pump and refer to the troubleshooting guide. The vertical float switch must be moving freely at all times. Make sure the float switch does not come into contact with other pumps, wires, pipe or any other object that may be in the pit. The float switch must not come into contact with the pit floor or wall. If the float switch does not move freely the pump will not activate.*
2. Replace the pit cover with gas-tight seals making sure not to crimp any of the wires within the cover.

Maintenance Check List

Maintenance should be performed 1-2 times per year.

1. Remove all debris from the bottom of the pit and make sure the pump's inlet is clear of debris.
2. Remove all debris floating in the water.
3. Remove all debris from the float switch.
4. Fill the pit with water. Make sure pump turns on at the intended level.
5. While the pump is running, make sure pump is evacuating water at a good pace.
6. While the pump is running, make sure a stream of water is escaping from the air bleed hole. If not, clear the hole of any deposits or debris.

Visit our website www.stopflooding.com for more information about the Pro Series AC sump pumps and battery backup sump pump products.

Troubleshooting Guide (Always unplug the pump from the controller before performing any maintenance)

Problem	Potential Cause	Solutions
The pump will not start or run	Pump is not plugged in	Plug pump in properly (see instructions)
	The float switch is not connected to the controller	Check connection of the float switch to the controller
	Water is not high enough to activate the pump	Make sure float switch is positioned properly
	Open circuit	Check circuit breaker or fuse
	Poor power source	Check circuit line wires and cable*
	Low voltage	Check line wires and source voltage*
	Bad power cable	Replace with new cable*
	Locked impeller	Remove strainer and clear obstruction
	Defective float switch	Replace float switch with new float switch
Thermal protector tripping or not functioning	Defective pump	Replace pump with new pump
	Locked impeller	Remove strainer and clear obstruction
	Incorrect power supply	Check power supply source and voltage
	Overburdened due to heavy sand content in the water	Use water filter or replace with a higher wattage pump
Pump starts and stops too frequently	Pump running continuously with no water present	Check float switch
	Float switch or sensor is mounted too low	Raise float switch or adjust timer (Enhanced or Deluxe Controller)
	Water flowing back from pipe	Install or replace check valve
Pump will not shut off	Malfunctioning float switch	Replace float switch with new float switch
	Clogged or frozen discharge	Clear blockage or thaw frozen line
	Blocked intake	Clear debris from intake
	Float switch is obstructed and can not drop down	Clear obstruction from float switch
	Defective float switch	Replace float switch with new float switch
Insufficient or no water volume	Check valve installed with no air bleed hole in pipe or pump	Drill a bleed hole in the discharge pipe, or clean debris from the existing hole in the pipe or pump
	Check valve is stuck or installed upside down	Reverse or replace check valve. Make sure the check valve is installed with the flow arrow pointing up and out of the pit.
	Worn impeller	Replace impeller & adjust spacing between impeller and cover
	Partially blocked impeller	Remove strainer and clear obstruction
	Clogged or frozen discharge	Clear blockage or thaw frozen line
	Broken or leaking pipe	Repair piping
	Low power voltage	Check power voltage, wires and cable condition
	Check valve installed with no air bleed hole in pipe or pump	Drill a bleed hole in the discharge pipe, or clean debris from the existing hole in the pipe or pump
Abnormal sound or vibration	Check valve is stuck or installed upside down	Reverse or replace the check valve. Be sure check valve is installed with flow arrow pointing up and out of the pit.
	Pump is air locked	Remove debris from the air bleed hole
	Check valve on secondary pump will not close and water re-circulates within the system	Replace the check valve on the secondary pump
	Blocked intake	Clear debris from intake
	Broken impeller	Replace impeller with new one

*Consult a licensed electrician.

If the above solutions do not solve the problem, contact Glentronics customer service 800-991-0466.

Limited Warranty

By opening this package and using this GLETRONICS, INC. product, you are agreeing to be bound by the terms of the GLETRONICS, INC. limited warranty ("warranty") as set out below. Do not use your product until you have read the terms of the warranty. If you do not agree to the terms of the warranty, do not use the product and return it within the return period stated on your purchase receipt from the retail store or authorized distributor where you purchased it for a refund.

To the extent permitted by law, this warranty and the remedies set forth are exclusive and in lieu of all other warranties, remedies and conditions, whether oral, written, statutory, express or implied. GLETRONICS, INC. disclaims all statutory and implied warranties, including without limitation, warranties of merchantability and fitness for a particular purpose and warranties against hidden or latent defects, to the extent permitted by law. GLETRONICS, INC. will not be liable for any incidental, special or consequential damages for breach of any express or implied warranties on this product. In so far as such warranties cannot be disclaimed, GLETRONICS, INC. limits the duration and remedies of such warranties to the duration of this express warranty and, AT GLETRONICS, INC.'s option, the repair or replacement services described below. Some states (countries and provinces) do not allow limitations on how long an implied warranty (or condition) may last, so the limitation described above may not apply to you.

Any and all causes of action arising from, filed as a result of or in reference to, this warranty or the products described under this warranty shall be governed by and construed under the laws of the State of Illinois. Any cause of action arising from, filed as a result of or in reference to, this warranty or the products described under this warranty shall be filed only in the Circuit Court of the 18th Judicial District, Lake County, Waukegan, Illinois, or in the Northern District of Illinois if filed in Federal Court. The maximum liability for any product described in this warranty shall be the cost of product replacement only.

If any term is held to be illegal or unenforceable, the legality or enforceability of the remaining terms shall not be affected or impaired.

What is Covered by this Warranty?

GLETRONICS, INC. warrants to the end purchaser that its pumps, switch and control unit products are free from defective materials and workmanship for the periods indicated below:

All parts and labor (excluding installation) for a period of:

- 3 years from the date of installation, when used intermittently as a sewage pump

The defective product must be returned directly to the factory, postage prepaid with the original bill of sale or receipt to the address listed below. GLETRONICS, INC., at its option, will either repair or replace the product and return it postage prepaid.

What is NOT Covered by this Warranty?

This warranty does not cover the cost or value of damaged property, including expressly any property that has been affected by water overflow, seepage or flooding. If GLETRONICS, INC. determines that a product is deemed defective under this warranty agreement, it will repair or replace the PRODUCT ONLY. GLETRONICS, INC. will not cover the cost to reinstall the product, nor will GLETRONICS, INC. pay the cost of having a plumber or contractor repair or replace the product.

GLETRONICS, INC. will not repair or replace a product that was installed incorrectly. A product shall be considered "installed incorrectly" when it deviates in any way from the instructions described in this manual.

This warranty does not cover product problems resulting from handling liquids hotter than 104 degrees Fahrenheit, handling inflammable liquids, solvents, strong chemicals or severe abrasive solutions; user abuse; misuse, neglect, improper maintenance, commercial or industrial use; improper connection or installation, damages caused by lightning strikes; excessive surges in AC line voltage; water damage to the controller; other acts of nature, or failure to operate in accordance with the enclosed written instructions.

How to Obtain Warranty Service

Within thirty (30) days of the product's defective performance, the unit must be shipped, freight prepaid, or delivered to GLETRONICS, INC. to provide the services described hereunder in either its original carton and inserts, or a similar package affording an equal degree of protection. Products not received by GLETRONICS, INC. at the address indicated below within thirty (30) days of the product's defective performance will not be considered for warranty service. Products received after the above mentioned timeframe fall outside of the timeframe for warranty service and will not be eligible for warranty service. The product must be returned to GLETRONICS, INC. for inspection in order to be considered for warranty service. If the product is not returned to GLETRONICS, INC. or the product is inspected by any person, plumber, contractor or business other than GLETRONICS, INC., this warranty shall no longer be valid. Prior to defective operation, the unit must not have been previously altered, repaired or serviced by anyone other than GLETRONICS, INC., or its agent; the serial number on the unit must not have been altered or removed; the unit must not have been subject to accident, misuse, abuse or operated contrary to the instructions contained in the accompanying manual. The dealer's dated bill of sale, or installer's invoice must be retained as evidence of the date of purchase and to establish warranty eligibility.

Where are Products Sent for Warranty Service?

Glentronics, Inc., 645 Heathrow Drive, Lincolnshire, IL 60069

How Can I Obtain More Information?

By calling 800-991-0466.